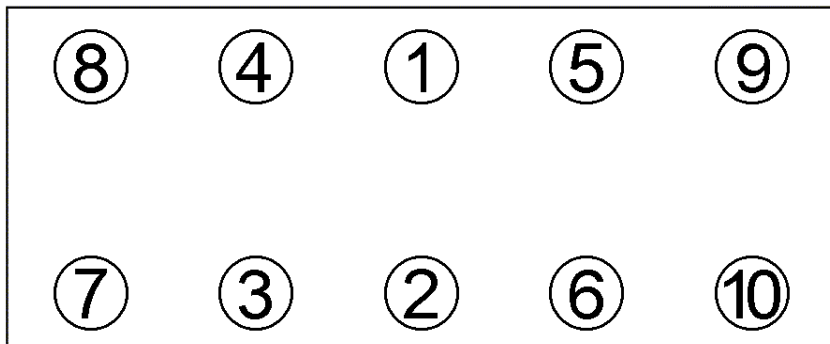


**Anziehvorschrift Zylinderkopf****Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****987.043**passend für / suitable for  
adaptable à / adaptable a**Das Original**Schraubenkopf / Head shape    Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

759.371

M 10x93/107,5x1,5

Anziehen/  
Tightening/  
Serrage/  
Apriete

- 20 Nm
- 100° ± 6°
- 3 min

Pos. 1 und 2:

- 20 Nm + 100°±6°

Pos. 3-6:

- 20 Nm + 100°±6°

Pos. 7-10:

- 20 Nm + 100°±6°

**Zeichenerklärung / Explanations / Explication / Explicacion**

|  |                                                |                                 |                                   |                                          |
|--|------------------------------------------------|---------------------------------|-----------------------------------|------------------------------------------|
|  | neue Zylinderkopf-<br>schrauben verwenden      | use new cylinder head<br>bolts  | utiliser des vis neuves           | emplar tornillos nuevos                  |
|  | Warmlauf (80°C)                                | warm up time (80°C)             | chauffage (80°C)                  | calentamiento (80°C)                     |
|  | Schrauben einzeln lösen<br>und wieder anziehen | loosen and tighten each<br>bolt | deserrer et serrer<br>vis par vis | aflojar y apretar<br>tornillo a tornillo |
|  | Setzzeit                                       | relaxation time                 | durée de tassement                | tiempo de espera                         |
|  | Drehwinkel                                     | torque angle                    | angle de serrage                  | ángulo de giro                           |

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Ø: 77 mm, ÷: 1,43 mm

Mot: E5F 710, 716, E6J 700, 701, 706, 712,  
713, 718, 760, E7F 700, 706, E7J 624  
626, 634, 635, 706, 718, 719, 720, 724,  
726, 728, 742, 745, 754, 780

R19, Clio, Kangoo, Megane, Rapid

**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

26/06/29

**\*987.043\***